


- 1 Motherboards
- 2 Disk-Size SBCs
- 3 CPU Modules
- 4 PC/104 Plus
- 5 CPU Cards
- 6 AGP & MicroAGP
- 7 Embedded Systems
- 8 Network Security Appliance

ET722

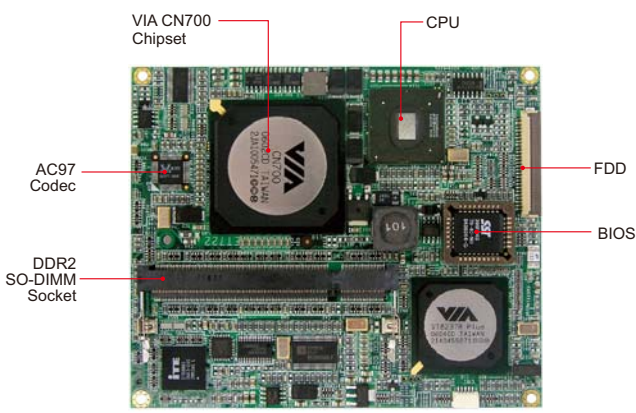

Features

- Onboard VIA Eden™-V4 / C7™ processors
Up to 2.0GHz, 400/533MHz FSB
- 1x DDR2 SO-DIMM, Max. 1GB
- Integrated VGA, 10/100BaseT LAN
- Supports 18-bit/24-bit dual channel LVDS
- 4x USB 2.0, 2x COM



System

CPU	VIA Eden™-V4 / C7™, up to 2.0GHz
System Memory	1x DDR2 SO-DIMM, Max. 1GB
System Chipset	VIA CN700+ VT8237R+, 400/533MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	On baseboard

Graphics

VGA Controller	VIA CN700 integrated
VGA Memory	Shared memory Max. 64MB
LCD Interface	Supports 18-bit/24-bit dual channel LVDS

LAN

Controller	VIA VT8237R+ built-in 10/100 + VT6103 PHY
Connector	On baseboard

Multi I/O

I/O Chipset	Winbond W83697HF 1x FDD, 2x IDE (UDMA33/66/100/133), 2x RS-232, 1x KB, 1x Mouse on baseboard
USB	4 ports on board (USB 2.0)
Audio	VIA VT8237R+ built-in audio + AC97 codec
Others	IrDA

Mechanical and Environmental

Dimensions	95mmx 114mm (3.74"x 4.49")
Max. Power Requirement	VIA Eden-V4 1.0GHz w/ 512MB DDR2 +5V: 3.26A +12V: 0.28A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

ET722-1G-R	VIA Eden™-V4 1.0GHz ETX CPU module w/ VGA and 10/100 LAN with heat spreader
ET722-400-R	VIA Eden™-V4 400MHz ETX CPU module w/ VGA and 10/100 LAN with heat spreader
IP100P-R	5.25" Disk-Size ETX Baseboard (1.0)

Remarks:
* Specifications are subject to change without prior notice.