




- 1 Motherboards
- 2 Disk-Size SBCs
- 3 CPU Modules
- 4 PC/104 Plus
- 5 CPU Cards
- 6 AGP & MicroAGP
- 7 Embedded Systems
- 8 Network Security Appliance

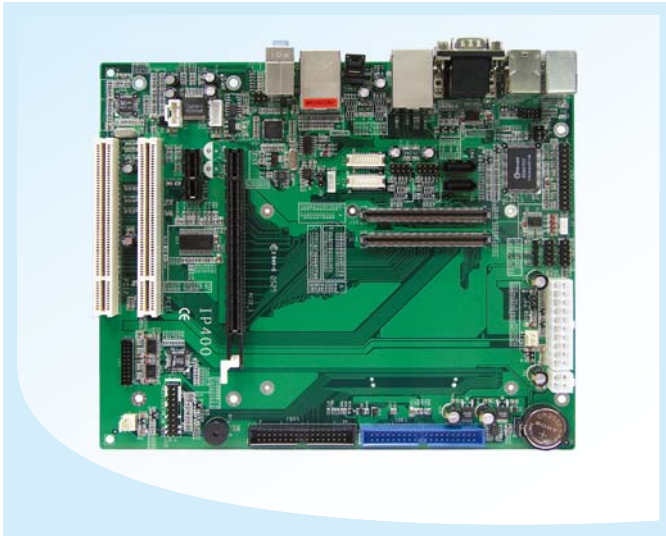

IP400


Flex ATX COM Express Baseboard

Features

- Winbond W83627EHF and Fintek F81216D I/O
- Watchdog timer, 4-in / 4-out digital I/O
- 1 x PCI-E 16, 1 x PCI-E 1, 2 x PCI (32-bit) slots
- Marvell 88E8053 PCI-E GbE for LAN2
- NS LM4940 2W stereo audio amplifier
- Edge connectors for VGA, COM1, dual USB, dual RJ45, PS/2, audio RCA, SPDIF, S-Video and TV out RCA
- Board connectors for IDE, 2 x LVDS, 6 x USB, FDD, LPT, IrDA and COM Express Type II connectors
- 190mm x 228mm

Ordering Information

IP400-R: Flex ATX COM Express Baseboard with Marvell 88E8053 PCI-E GbE

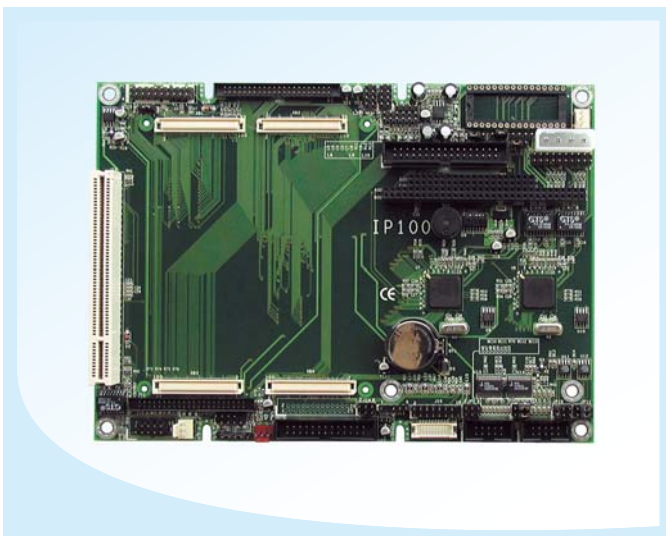

IP100P-R

5.25" Disk-Size ETX Baseboard

Features

- VGA CRT/LVDS connectors, 4 x serial ports
- DiskOnChip[®], Digital I/O, IrDA
- 4 x USB, PS/2 Keyboard/mouse, PCI slot
- FDD/IDE/LPT, PC/104 interface
- 203mm x 146mm

Ordering Information

IP100P-R: 5.25" Disk-Size ETX Baseboard w/o LAN

IB10: Cable kit for IP100

IBD: RJ-45 cable w/ bracket

IBLD: Dual RJ-45 cable w/ bracket