




IB881

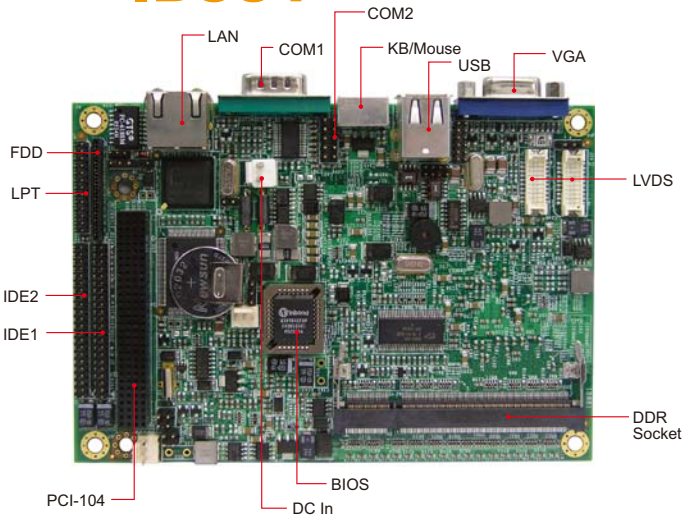

System

CPU	Socket 479 for Pentium® M / Celeron® M or CPU on board 600MHz ~ 1.6GHz
System Memory	1x SO-DIMM, Max. 1GB, DDR200/266/333
System Chipset	Intel® 855GME/852GM + ICH4, 400MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	1x PCI-104

Graphics

VGA Controller	Intel® 855GME/852GM integrated Extreme Graphics 2, supports dual display
VGA Memory	Intel Dynamic Video Memory Technology (DVMT 2.0) Max. shared memory: 96MB
LCD Interface	18-bit LVDS (dual channel)

LAN

LAN Controller	Intel® ICH4 integrated, 10/100Mbps + PHY 82562ET
Connector	RJ-45 on board

Multi I/O

I/O Chipset	Winbond W83627HF 2x IDE (UDMA33/66/100), 1x slim FDD, 1x KB, 1x Mouse, 2x RS-232, 1x LPT
USB	4 ports (2 on board, 2 via pin header), USB 2.0
Audio	Built-in audio + AC97 codec

Features

- Supports Pentium® M / Celeron® M processors
Up to 1.6GHz, 400MHz FSB
- 1x DDR SO-DIMM, max. 1GB
- Integrated VGA, shared memory, CRT/LVDS, supports dual display
- Integrated 10/100BaseT LAN
- Watchdog timer, Hardware Monitor
- 1x PCI-104, 4x USB 2.0, 2x COM

Mechanical and Environmental

Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	DC 12V:3.5A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

IB881-R	Socket 479 855GME 3.5-inch SBC w/ VGA and 10/100 LAN
IB881-C6K-R	Intel® Celeron® M 600MHz (512K cache) 852GM 3.5-inch SBC w/ VGA and 10/100 LAN
IB881-C8-R	Intel® Celeron® M 800MHz (512K cache) 852GM 3.5-inch SBC w/ VGA and 10/100 LAN
IB32	Cable kit for IB881 series, w/ IDE, COM, printer, audio, USB and PS/2 Y cable
IB33	ATX power switch/power cable for IB881 series
CSB100-881	Steel System with IB881-C6K 3.5" SBC Board, Intel® Celeron® M (600MHz) CPU, 1GB DDR, 2.5" 80GB HDD, 60W Power Adaptor
ASB200-881	Aluminum System with IB881-C6K 3.5" SBC Board, Intel® Celeron® M (600MHz) CPU, 1GB DDR, 2.5" 80GB HDD, 60W Power Adaptor



Remarks: * Specifications are subject to change without prior notice.